




**American Braiding & Manufacturing**  
247 Old Tavern Road  
Howell, New Jersey 07731 USA  
Phn 800-899-5018 / 732-938-6333  
Fax 732-938-6377

**Style Number:** 344BIL-SC  
**Service:** Pump Packing  
**Product Type :** Braided Packing

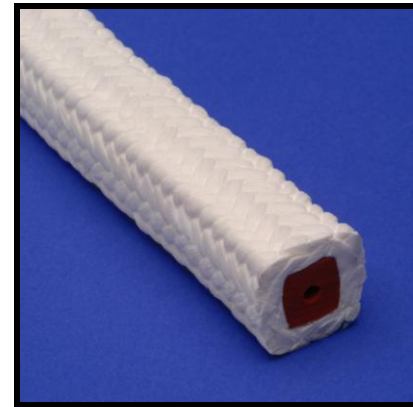

**Description:**

Braided from 100% PTFE filament, Style 344BIL-SC is thoroughly impregnated with a PTFE suspensoidal blocking agent and our proprietary break in lube. Our unique blend of lubricating oils eases friction during startup and operation, while a durable silicone core added during braiding enhances compression recovery, and combats worn shafts and shaft deflection. A soft but dense and stable packing, 344BIL-SC is ideally suited for chemical process pumps where extreme chemical resistance and extremely low shaft friction are required.

<b>Construction:</b>	Interlock Braid
<b>Temperature Rating:</b>	500° F / 260°C
<b>pH Rating:</b>	0 – 14
<b>Shaft Speed Rating:</b>	1500 FPM / 8 MPS
<b>Pressure Rating:</b>	300 PSI / 20 BAR