




**American Braiding & Manufacturing**  
247 Old Tavern Road  
Howell, New Jersey 07731 USA  
Phn 800-899-5018 / 732-938-6333  
Fax 732-938-6377

**Style Number:** 344V  
**Service:** Valve Stem Packing  
**Product Type :** Extruded PTFE Cord

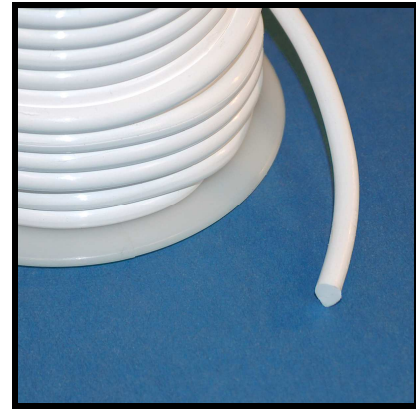

**Description:**

Manufactured from 100% Teflon, Style 344V is designed for use as a non-hardening gasket sealant and valve stem packing. Style 344V is a high density, chemically inert, conformable product with unlimited shelf life. After installation, 344V remains pliable and continues to seal effectively without hardening.

<b>Construction:</b>	Twisted PTFE cord
<b>Temperature Rating:</b>	600° F / 315°C
<b>pH Rating:</b>	0 – 14
<b>Shaft Speed Rating:</b>	NA
<b>Pressure Rating:</b>	490 PSI / 33 BAR