




American Braiding & Manufacturing
247 Old Tavern Road
Howell, New Jersey 07731 USA
Phn 800-899-5018 / 732-938-6333
Fax 732-938-6377

Style Number: 8000TK
Service: Pump and Valve Packing
Product Type : Braided Packing

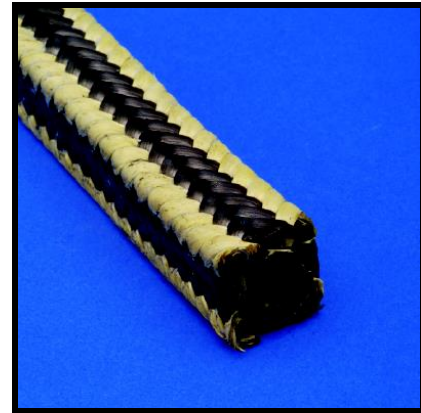

Description:

Braided from PTFE/Graphite fiber filament yarn made from finely ground particles of high quality graphite encapsulated in a Teflon® matrix to eliminate graphite migration, and aramid corners for superior abrasion resistance. For use in valves, Centrifugal pumps, rotary pumps, reciprocating pumps, this packing is ideal for use in most corrosive and abrasive applications.

Construction:	Interlock Braid
Temperature Rating:	500° F / 260°C
pH Rating:	2 – 12
Shaft Speed Rating:	2500 FPM / 13 MPS
Pressure Rating:	500 PSI / 34 BAR